


TYPICAL CABLE LABELING METHOD

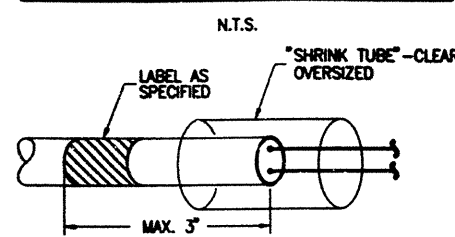

- APPLY LABEL TO OUTER JACKET OF CABLE. MAXIMUM OF 3" FROM STRIPPED END AS SHOWN. NOT TO BE COVERED BY OVERSIZED SHRINK TUBE.
- DETAIL APPLIES TO ALL CABLE TYPES

CIRCUIT LEGEND:

CIRCUIT DESIGNATION	
STR-A	CABLE IDENTIFICATION TAG; LIGHT TEXT REPRESENTS EXISTING CABLE TAG TO REMAIN, HEAVY TEXT REPRESENTS THE TAG (BRADY LABEL #WML-305-292 O.A.E.) TO BE FURNISHED & INSTALLED.
STR-B	
STR-C	
STR-A	
TYPE OF CIRCUIT.	CIRCUIT NUMBER OR NAME.
STR - STROBE CIRCUIT.	A TO G - STROBE OR SPEAKER CIRCUIT NUMBER
STR - SPEAKER CIRCUIT.	ATC - CIRCUIT TO ADDRESSABLE TERMINAL STRIP CABINET.
STR - ALD - LOOP DEVICE CIRCUIT	PS - CIRCUIT TO PULSE STATIONS
(EXCEPT SMOKE DETECTOR).	ELEV - CIRCUIT TO ELEVATOR LIFTOR AND ELEVATOR
STR - PHONE CIRCUIT.	MACH - BOX - CIRCUIT TO MACHINE BOX
TEL - SMOKE DETECTOR CIRCUIT.	HVAC AREA - CIRCUIT TO HVAC SMOKE DETECTOR
STR - MAINTENANCE PHONE JACK CIRCUIT	OPEN AREA - CIRCUIT TO OPEN AREA SMOKE DETECTOR
WARDEN TO INTERCOM CIRCUIT	INTERCOM - CABINET CIRCUIT
STR - STAND PIPE PHONE JACK CIRCUIT	TIB - TENANT INTERFACE BOX